

Rotary Heat Press RTR-H

Roll to Roll High End



Available in Mid-Level Version,
please contact us.

RTR-H Series

- Automatic Nomex Drum Blanket Alignment
- Detects Surface Temperature
- Filling Oil Drum to 100% (Saving 30% Power)
- Precise Temperature Control (Controllable Silicon Solid State Relay)
- Minimizing Maintenance Effort (Slip Ring)
- At least 70% Nomex Drum Blanket Coverage
- Nomex Drum Blanket Controlled by Piston
- Fabric/Transfer Paper/Tissue Paper controlled by compressed air
- Auto Power On/Off

Model	RTR 1742-H	RTR 2642-H	RTR 3242-H
Heating Media	Oil, 100% Full		
Voltage	3 phase, 220V / 380V / 480V		
Heating Power	20kW	33kW	39kW
Number of Heating Elements	12		
Diameter of Drum	420mm or 16.5" (Available in 600mm/800mm/1000mm), Double Layer		
Transfer Speed	Transfer Paper: 2m/min - Offset Paper: 3m/min		
Max Temperature	240°C or 464°F		
Transfer Width	1600mm or 64"	2500mm or 98"	3150mm or 124"
Nomex Drum Blanket Width	1700mm or 67"	2600mm or 102"	3250mm or 128"
Process Path	Feeding in Through Bottom of Drum		
Function of Roll-to-roll	Yes		
Function of Piece-by-piece	No		
Number of Feeding Rollers	3		
Number of Collecting Rollers	3		
Work Table	No		
Transfer Pressure Bars	For H Series only, Air Compressor Included		
Machine Dimension	100" x 55" x 79"	134" x 55" x 79"	161" x 55" x 79"

Nomex Drum Blanket and Oil Drum are not under warranty.



Other parts are eligible for 15 months warranty under proper use (starting from exit of factory)

RTR-H_D2u.pdf


Rotary Heat Press RTR-H

Roll to Roll High End

Available in Mid-Level Version, please contact us.

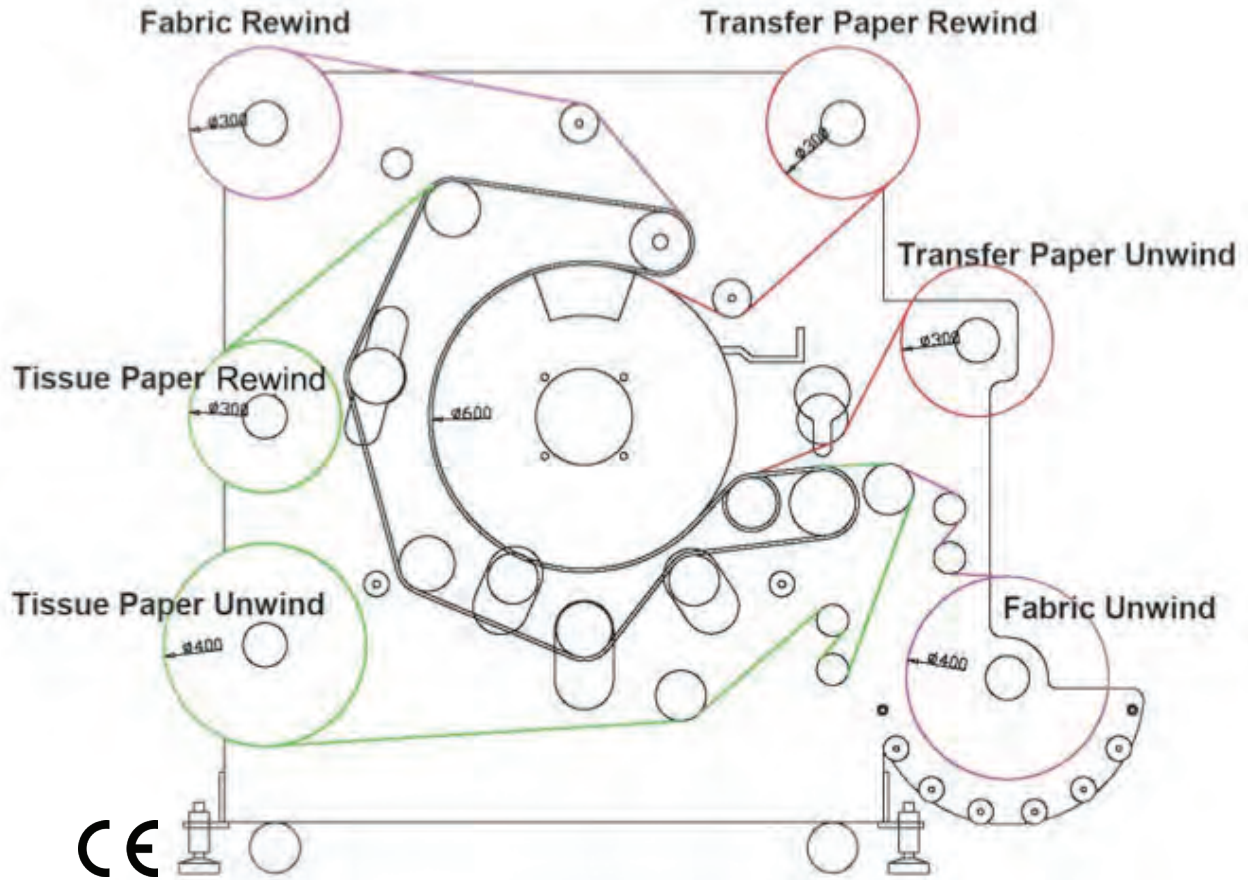

100% Full Oil Drum



Slip Ring



Auto Power On/off



Pneumatic Control



PLC



Controllable Silicon
Solid State Relay

Call us at **720-480-5196** to order **USA** heatpress.com