

Rotary Heat Press HS

Industrial Level

Garments
 Mouse Pad, Carpet
 Flag, Tent, Blanket, Curtain
 Polyester Fabric in Rolls or Piece





HS Series

- Chromium coated Oil drum
- Aligning Material and Felt Automatically
- Detecting Temperature on the Surface
- Controlling Temperature Precisely (Controllable Silicon Solid State Relay)
- Blanket coverage at least 80%
- Blanket Tension Controlled by Piston
- Fabric/Transfer Paper/Tissue Paper Tension Controlled by Compressed Air
- Daily Power On/off
- User-friendly Interface with Touch Screen
- Over-feeding System for Spandex
- Width Expanding System
- Fabric Cooling System
- High-end Fabric Aligning System (optional)
- Fabric Water Cooling System (optional)
- Fabric Discharge Swinging System (optional)
- Electric Crane (optional)

| | HS 17120 |
|--------------------------|--|
| Heating Media | Oil, Almost 55% full |
| Voltage | 3 Phase 380V |
| Power | 95 kW |
| Heating Elements | 51 |
| Diameter of Drum | 1200 mm (Available in 800mm/1000mm/1500mm) |
| Transfer Speed | 3-15m/m |
| Max Temperature | 230° C or 446° F |
| Transfer Width | 1700mm |
| Nomex Drum Blanket Width | 1880mm |
| Process Path | Feeding in through bottom of Drum |
| Roll-to-roll | Yes |
| Piece-by-piece | No |
| Feeding Rollers | 4 |
| Collecting Rollers | 4 |
| Air Compressor | Required, Air Compressor Not Included |
| Auto Felt Alignment | Yes |
| Auto Fabric Alignment | Yes |
| Machine Dimension | |

Nomex Drum Blanket is not under warranty. Oil Drum and other parts are eligible for 1 year warranty under proper use (starting from exit of factory)

Rotary Heat Press HS

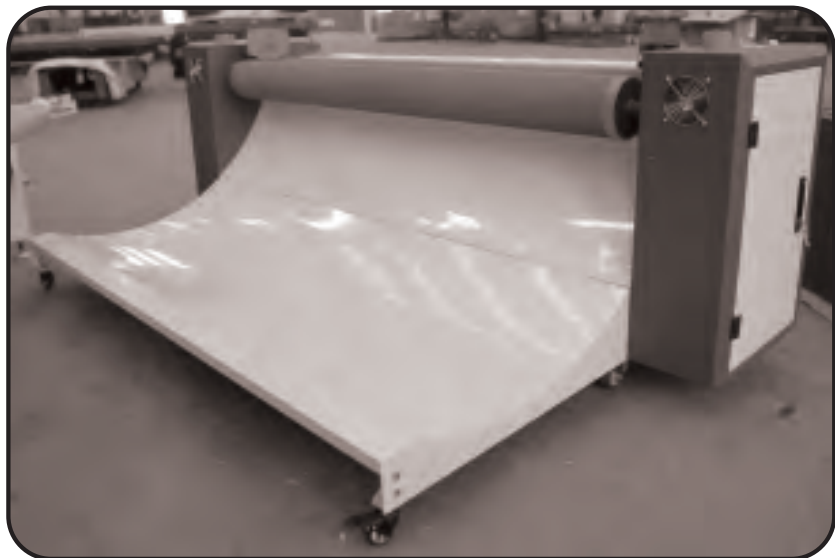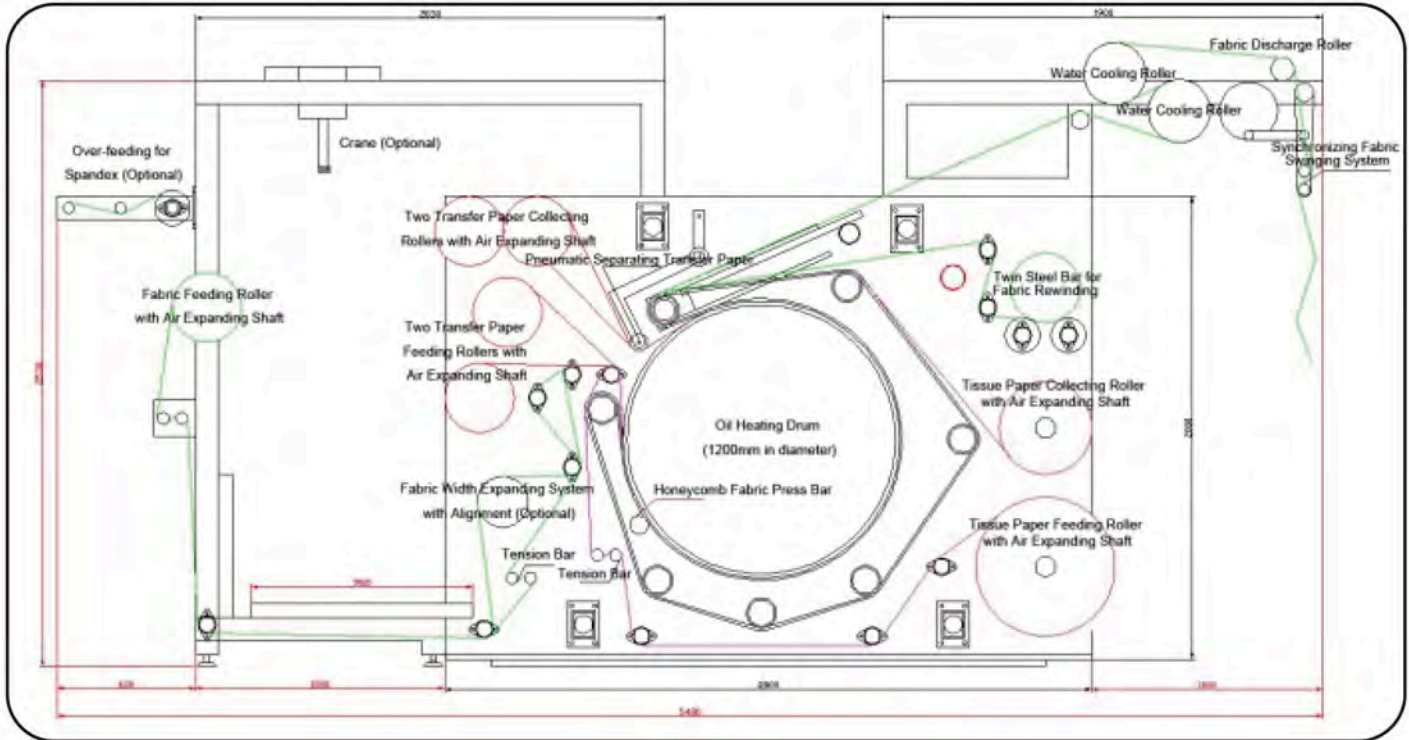

Call us at **720-480-5196** to order **USA** heatpress.com